




Linschmann Peter · Feuerweg 21 · 90518 Altdorf

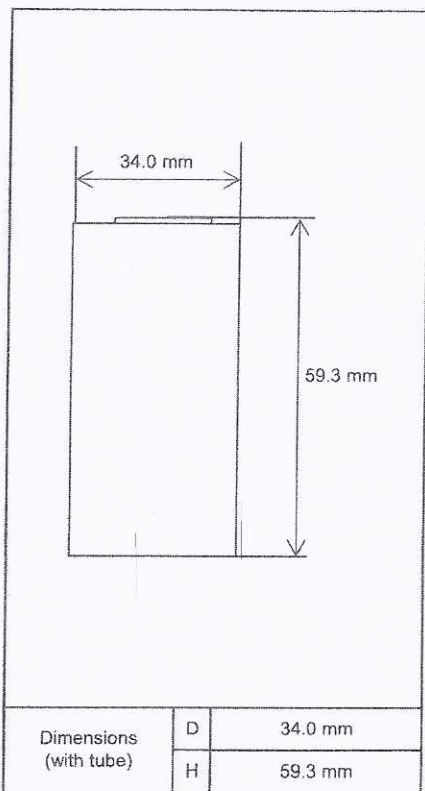


Type : Nickel-Metal Hydride Battery		Size : D
Capacity <sup>1)</sup>	Typical	10000mAh
	Minimum	9300mAh
Nominal Voltage		1.2V
Charging Current x Time	Fast Charge <sup>2)</sup>	5000 mA x about 2.2h
Ambient Temp.	Charge Condition	Fast Charge <sup>2)</sup>
		0°C - 40°C
	Discharge Condition	
		0°C - 50°C
Storage Condition	Less than 30days	-20°C - 50°C
	Less than 90days	-20°C - 40°C
	Less than 1year	-20°C - 30°C
Internal Impedance <sup>3)</sup> (after discharge to E.V.=1.0V)		Approx. 5mΩ(at 1000Hz)
Weight <sup>4)</sup>		Approx. 175 g
Size <sup>4)</sup> : (Diameter) x (Height)		34.0(D) x 59.3(H) mm

- 1) Single cell capacity under the following condition.
- 1) Charge : 1000mA×16h, Discharge : 2000mA(E.V.=1.0V) at 20°C
- 2) Use recommended charging system.
- 3) After a few charge and discharge cycles under the above 1) condition.
- 4) With tube.

## Typical Characteristics

### Charge

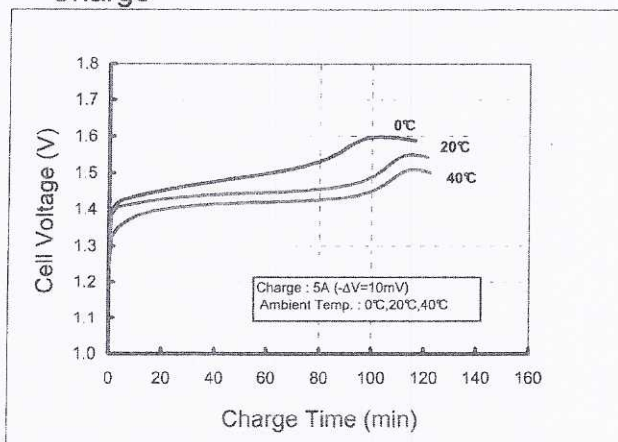

### Discharge

